

Inductive charging of ultracapacitor buses

Jayesh Kodwani Sumit Sonar Roshan Undarkar

Project Guide: Prof. Sachin Datey

DEPARTMENT OF ELECTRICAL ENGINEERING SKN SINHGAD INSTITUTE OF TECHNOLOGY & SCIENCE
KUSGAON(BK)

Abstract - Many public transit agencies are exploring ways in which alternative fuels can be utilized to reduce our nation's dependency on imported oil and to avoid the environmental impacts associated with the combustion of petroleum products. Of all the alternative fuel options, electricity is among the most desirable in terms of affordability, availability, security, and sustainability. Unfortunately, limitations in battery technology result in electric vehicle operating ranges that are much lower than those of internal combustion-powered vehicles. Although opportunity charging is one strategy for increasing the driving range of electric buses by means of a series of brief recharges during normally scheduled midday layovers, it has yet to be embraced by the transit industry, in part because of the difficulties involved in having drivers connect and disconnect the bus from the charger at regular intervals throughout the day. Roadway-mounted inductively-coupled power transfer systems effectively remove this constraint by automating the charge process, thereby obviating the need for driver intervention. Ultracapacitor energy storage systems offer advantages over battery systems for such applications.

Key Words: Ultracapacitor, Opportunity Charging, Inductive Charging, Transit, Electric Bus.

BACKGROUND:

Battery-electric buses are widely recognized as the most environmentally benign of all the alternatively fueled public transportation options, even when emissions from the power plants that provide the electricity to recharge the batteries. This is true of both regulated ("criteria") emissions and greenhouse gas emissions. Electric propulsion is also the only vehicle propulsion technology that can directly utilize

clean and renewable energy sources such as solar and wind power. Battery electric buses have additional benefits such as quiet operation and zero tailpipe emissions, highly desirable attributes for urban, campus, and medical center applications involving substantial pedestrian activity and/or noise and emission-sensitive populations.

In addition to the well-documented environmental benefits, battery electric buses also have lower fuel costs and offer the potential for favorable maintenance costs as compared with diesel and other fuels. A recent Federal Transit Administration report to Congress indicates that battery electric buses require only about one-third the fuel cost per mile than the next cheapest propulsion strategy (catenary electricity for trolley buses), and only about one-quarter the fuel cost as diesel propulsion; even greater fuel cost savings accrue when compared with other alternative fuels.

Given a battery electric bus's favorable environmental benefits, low noise, zero local emissions, low fuel cost, and potential for low maintenance costs, it is somewhat surprising that they have not enjoyed widespread commercialization. Battery electric buses have not been successfully deployed in most applications because the various shortcomings of the battery-electric bus are significant. Virtually all of the associated problems, however, are directly related to deficiencies in battery technology.

INTRODUCTION TO ULTRACAPACITORS

Ultracapacitors (also referred to as supercapacitors) are electrochemical capacitors that have unusually high energy densities when compared with common capacitors; they are of particular interest in automotive applications for hybrid vehicles and as supplementary storage for battery electric vehicles. Although they exhibit numerous advantages as compared with traction batteries, their gravimetric energy density is only about 10% that of lead-acid batteries, heretofore rendering them unsuitable as a primary energy storage element in electric vehicles.

Areas of advantage for ultracapacitors as compared with battery systems include the following:

1. Very high rates of charge and discharge resulting in fast recharge times, adequate acceleration power in relatively low energy systems, and excellent acceptance of regenerative braking;
2. Little degradation over hundreds of thousands of cycles resulting in exceptional cycle life;
3. Essentially maintenance-free operation;
4. Excellent reliability over a wide temperature spectrum and harsh environments;
5. Low toxicity of materials used;
6. High cycle efficiency (95% or higher).

As a result, ultracapacitors would be an excellent substitute for batteries in pure electric vehicles if not for their relatively poor energy density. This sole shortcoming could be circumvented, however, in an application that entailed high frequency, short duration, automated recharging. Certain public transit applications demonstrate favorable operational characteristics, particularly those involving low-speed shuttle operations in which the bus traverses a relatively short loop, returning to the same stops on a frequent, recurring basis. The installation at one of those stops of a roadway-mounted, automatic, inductively-coupled charging station (which does not require driver intervention to accomplish recharge) would complete the essential attributes of a pure electric vehicle system that might effectively utilize ultracapacitors in lieu of batteries for its sole energy storage medium.

ULTRACAPACITORS VS. BATTERIES:

Energy storage characteristics of interest to the electric bus industry include specific energy (the energy capacity of a battery per unit weight), cost, and cycle life. Although ultracapacitors have a high acquisition kWh of rated capacity as compared with batteries, their extremely long cycle life more than compensates, resulting in relatively low life-cycle costs. Coupled with their high reliability and virtually avoid exceeding the 1C charge rate. (Fast charging tends to result in accelerated heating of batteries, a condition that should be minimized because elevated battery temperature can result in accelerated internal corrosion and decreased battery longevity.) A representative 60-kWh lead-acid battery system has a power rating of approximately 300 kW. By comparison, a 2.6-kWh rated ultracapacitor system has a power rating of approximately 2,700 kW. The nearly ten-fold improvement in power rating attendant to the ultracapacitor system means that frequent recharges can occur without excessive heat generation and that total recovery of regenerative braking energy is possible, unlike with a typical battery system which is estimated to accept only about 50% of the available regenerative braking energy.

INDUCTIVE CHARGING SYSTEM

Although opportunity charging is one strategy for increasing the driving range of pure electric buses by means of a series of brief recharges during normally scheduled midday layovers, it has yet to be embraced by the transit industry, in part because of the difficulties involved in having drivers connect and disconnect the bus from the charger at regular intervals throughout the day.

1. An inductively-coupled charging system effectively removes this constraint by automating the charge process, thereby obviating the need for driver intervention. An inductive charge system contactless power transfer system that allows electrical energy to be supplied to buses without any electrical or mechanical contact. Each system consists of two parts (a primary and secondary) that are magnetically coupled similar
2. to a conventional transformer. The primary (stationary) side of a 60-kW system consists of a 70-kW track supply and two 30-kW primary coils imbedded in the street at the opportunity charge station (typically a bus stop at or near the end of the line). The secondary (vehicle) side consists of two 30-kW pickups and rectifiers installed onboard the vehicle.
3. Unlike a conventional transformer, where primary and secondary coils are tightly coupled, the inductive charge system is a loosely coupled system. Power can be transferred across air gaps of several centimeters. Having no physical contact, operation in harsh environments becomes possible. Power transfer is not affected by concrete, asphalt, or other nonpermeable materials.
4. Major components for a typical 30-kW system are depicted in Figures 1 and 2. A 60-kW system contemplated for bus applications involves the use of two stationary primary coils and two vehicle-mounted secondary pickups per bus. When an electric bus pulls into the charging station, the positioning system checks whether the bus is correctly positioned over the charging platform. If proper positioning is confirmed, a signal is sent to the track supply to automatically start the charging process. If the bus is not correctly positioned, the track supply will not switch on. Other objects, such as people, animals, cars, trucks, or other buses cannot cause the activation of the charging station. Termination of the charging process can be executed after a preprogrammed time (e.g., 2 minutes), by the bus driver, or automatically before the bus leaves the charging platform
5. CANDIDTE APPLICATION:

Four candidate electric bus configurations of varying lengths were evaluated for potential deployment on four candidate routes at a major US university campus with respect to the prospects for successful utilization of inductive charge technology [8]. The smaller buses have the lowest energy use requirements and therefore require the least time connected to the charge system to replenish the energy expended during each loop. Although the most promising route has a high energy consumption rate per mile driven because of its high stop-start frequency, its short loop length results in relatively short recharge times required at the end of each loop (less than two minutes for a 22-ft bus operating without air-conditioning). The operating parameters for a 22-ft. electric bus running without airconditioning on the most favorable route are presented in Table 1.

When an electric bus pulls into the charging station, the positioning system checks whether the bus is correctly positioned over the charging platform. If proper positioning is confirmed, a signal is sent to the track supply to automatically start the charging process. If the bus is not correctly positioned, the track supply will not switch on. Other objects, such as people, animals, cars, trucks, or other buses cannot cause the activation of the charging station. Termination of the charging process can be executed after a preprogrammed time (e.g., 2 minutes), by the bus driver, or automatically before the bus leaves the charging platform.

6.

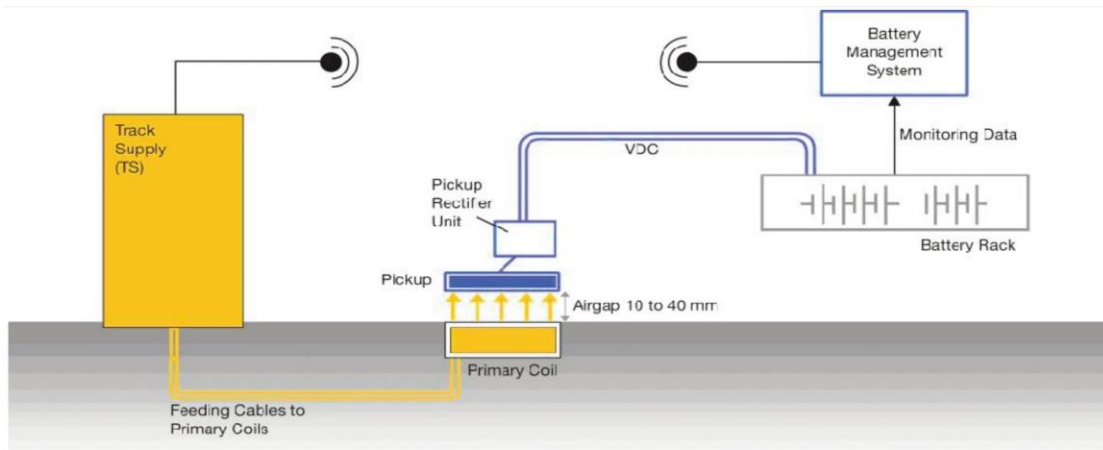


Figure 1. Major Components for Typical 30-kW Inductive Charge System, Block Diagram

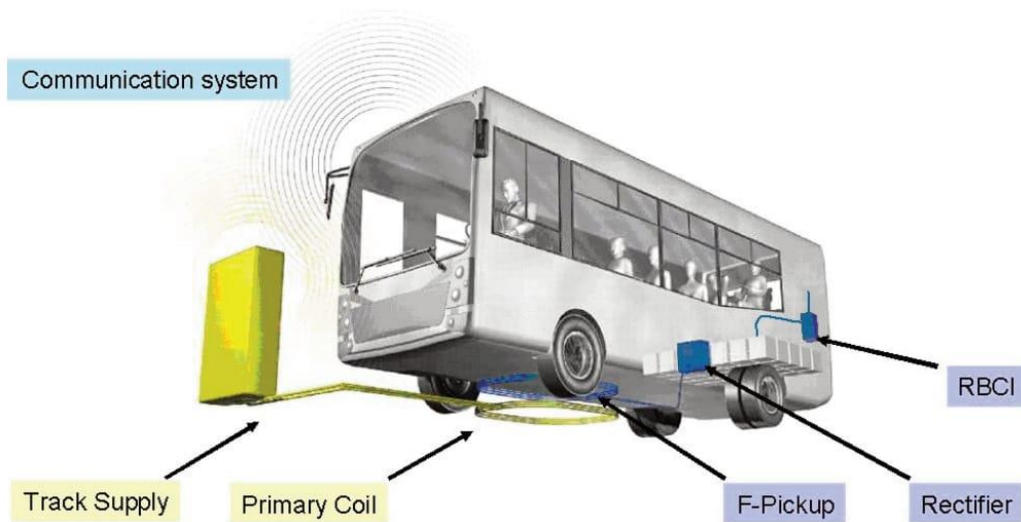


Figure 2. Major Components for Typical 30-kW Inductive Charge System, Insta

CANDIDATE ULTRACAPACITOR SYSTEM

Critical to the success of the contemplated project is the identification of a well-integrated ultracapacitor system. One candidate system would appear to be the Heavy-duty Transportation Module (“HTM”) manufactured by Maxwell Technologies. Maxwell’s 390V HTM module is depicted in Figure 3 and is summarized in Table 2.

In order to achieve the 1.93-kWh deliverable energy requirement identified in the previous section, seven Maxwell 390V HTM modules would be required ($7 \times 282 \text{ Wh} = 1.97 \text{ kWh}$). These seven modules would yield a system mass of 1,155 kg (2,541 lbs.), or about one-half the weight of a lead-acid battery system of appropriate capacity to accept a 60-kW recurring charge.

Assuming six recharge events per hour (one every ten minutes), ten hours of bus service per day, five days per week, and 50 weeks per year, the ultracapacitor system would experience a total of 15,000 cycles per year. This amounts to approximately 200,000 cycles of the ultracapacitor over a 12-year bus life expectancy, well short of the 1,000,000 projected cycle life and suggestive that ultracapacitor reliability would be extremely high during the operational life of the bus.



Figure 3. Maxwell 390V HTM Module

Table 2. Maxwell 390V HTM Module

Nominal Operating Voltage	390 Vdc
Maximum Operating Voltage	394 Vdc
Surge Voltage	406 Vdc
Energy Available (to ½ nominal voltage)	282 Wh
Maximum Continuous Current	150 A
Maximum Intermittent Current	950 A
Cycle Life (to 98% DOD)	1,000,000
Operating Temperature Range	-40C to +65C (-40F to +117F)
Maximum Ambient Operating Temperature	+50C (+122F)
Environmental Protection	IP65 (dust tight, water-jet protection)
Mass	165 kg (363 lbs)
Dimensions (with fan shroud assembly)	1200 mm L x 740 mm W x 299 mm H (47.3" x 29.2" x 11.8")
Cost	\$12,500

CONCLUSION:

Battery electric buses are widely regarded as the most environmentally benign of all the alternatively-fueled public transportation options, and offer additional benefits such as quiet operation, zero-tailpipe emissions, low fuel costs, and the potential for favorable maintenance costs. They have not, however, enjoyed widespread commercialization because of a number of operational and maintenance shortcomings that are the result of battery technology deficiencies. Although recent battery developments have produced incremental improvements in energy density, high costs and persistent maintenance issues associated with these technologies continue to limit the successful deployment of battery electric buses. The use of ultracapacitors in lieu of batteries in a pure electric bus would appear to circumvent most of the shortcomings associated with electric buses, namely battery system reliability and battery maintenance requirements. Furthermore, ultracapacitors are more effective at capturing regenerative braking energy, thereby improving the efficiency of the system. The only relative disadvantage of ultracapacitors is their lower energy density which results in reduced vehicle range between recharges; this can be mitigated, however, by the use of an automated inductive charging system installed in the roadway at one or more bus stops. If travel to storage or maintenance facilities cannot be accomplished with the ultracapacitor system, a trailermounted battery system could be utilized. In addition to improved vehicle reliability, an ultracapacitor electric bus would have considerably lower life cycle costs than its battery-powered counterpart as a result of reduced maintenance costs and lower energy storage system costs.

REFERENCE:

- [1] P. Griffith. Status of U.S. Battery-Electric Bus Operations. Proceedings of Electric Vehicle Symposium22, Advanced Transportation Technology Institute (ATTI), December 2006.
- [2] U.S. Department of Transportation, Federal Transit Administration. Alternative Fuels Study: A Report to Congress on Policy Options for Increasing the Use of Alternative Fuels in Transit Vehicles. December 2006.
- [3] Ibid.
- [4]<http://en.wikipedia.org/wiki/Supercapacitor>
- [5] Ibid.
- [6] Griffith, op. cit.
- [7] Approximately five times the overnight rate.
- [8] P. Griffith. Preliminary Technical Assessment of Inductively Charged Electric Bus for Application at University Campus. Advanced Transportation Technology Institute (ATTI), January 26, 2007.
- [9] Maxwell Technologies, Doc. # 1011285 Rev.2